

**Description**

TYTAN 2 LED BASIC MULTI includes new solutions which improve the light distribution and the temperature balance. The new LED panels ensure high luminous efficacy up to 141 lm/W. This provides the required level of lighting along with significant energy savings. The lighting fixture includes many improvements which facilitate and speed up the installation process. As a standard, the fixture is equipped with robust clips made of stainless steel (INOX). The body of the fixture and the diffuser are resistant to UV radiation. The MULTI luminaire version allows individual configuration: thanks to the built-in microswitch, it is possible to choose one of four settings (rated power of the luminaire [W]/luminous flux of the fitting [lm]):

**Key Features**


- Multi power configuration
- Easy installing bracket, saving your fix time and cost
- Anti-corrosion, high impact rating

**Applications**

- Warehouse, Factories
- Indoor car Parking
- Indoor sports ground
- Shopping Mall, Supermarkets
- Tunnels

**Specifications**

<b>Model No.</b>	SLTP940927			
<b>Power Consumption</b>	34W	43W	52W	62W
<b>LED Type</b>	Led module SMD			
<b>Luminous Flux up to</b>	4800lm	5750lm	6550lm	7300lm
<b>Efficacy up to</b>	141lm/W (5000K Ra80)			
<b>Correlated Color</b>	4000K (3000K, 5000K optional)			
<b>Color Rendering Index</b>	Ra80			
<b>Beam Angle</b>	180°			
<b>Driver Type</b>	Electronic driver internal			
<b>Input Voltage</b>	AC220-240V			
<b>Power Factor</b>	>0.90			
<b>Frequency</b>	50 / 60 Hz			
<b>Product Dim (mm)</b>	1152x85x80			
<b>Luminaire Net Weight</b>	1,6±0.1kg			
<b>Material</b>	<b>Housing</b>	Polycarbonate UV stabilized self-extinguishing		
	<b>Optics</b>	Polycarbonate UV stabilized self-extinguishing		
<b>Finish</b>	Gray			
<b>Insulation Class</b>	Class I			
<b>Protection Rating</b>	IP66			
<b>Impact Rating</b>	IK09			
<b>Operating Temperature</b>	-20°C to +35°C			
<b>Life Time</b>	>50,000Hrs (Ta=30°C@L70)			
<b>Warranty</b>	5 Years			
<b>Optional</b>	Emergency (add -E)			
	0-10V dimming (add -V)			
	Microwave Sensor (add -Q)			
	Linkable (add -L)			
<b>Accessory</b>	Protective grid			
	Adjustable handle			

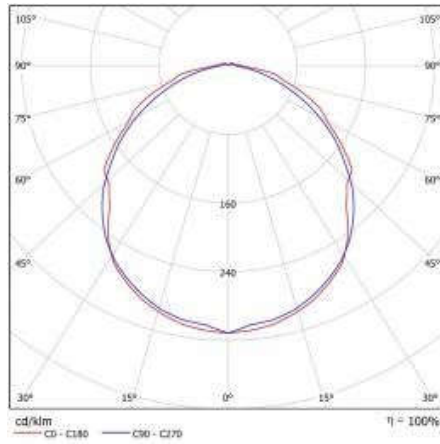

Mounting Options



adjustable handles



Switch




suspension system of the diffuser



choosing a place of power supply

Dimensions

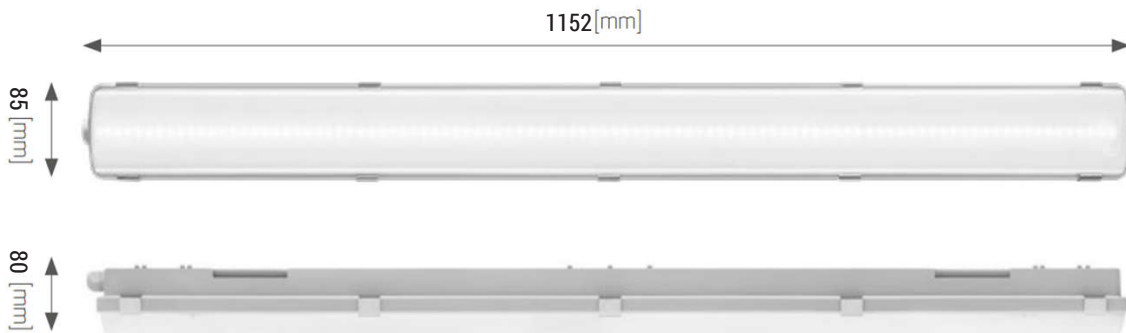

Accessories